




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01S 3/02, H04N 7/100, 5/222, 5/225, G08G 1/123		A1	(11) International Publication Number: WO 98/22831
			(43) International Publication Date: 28 May 1998 (28.05.98)
(21) International Application Number: PCT/US97/21119		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 19 November 1997 (19.11.97)		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(30) Priority Data: 60/031,655 19 November 1996 (19.11.96) US 08/835,037 27 March 1997 (27.03.97) US			
(71) Applicant (for all designated States except US): AMERICAN NAVIGATION SYSTEMS, INC. [US/US]; 115 West Main Street, Millbury, MA 01527 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): BACKMAN, Douglas, J. [US/US]; 3 Glenwood Road, Southborough, MA 01772 (US). ROE, Gene, V. [US/US]; 14 Bear Hill Road, Henniker, NH 03242 (US). DEFALCO, Frank, D. [US/US]; 80 Salisbury Street, Worcester, MA 01609 (US). MICHALSON, William, R. [US/US]; 26 Denfield Road, Charlton, MA 01507 (US).			
(74) Agents: BLODGETT, Gerry, A. et al.; 43 Highland Street, Worcester, MA 01609 (US).			

(54) Title: HAND-HELD GPS-MAPPING DEVICE

(57) Abstract

A hand-held navigation, mapping and positioning system and device (10) contains a Global Positioning System (GPS) receiver (13), a database capable of storing vector or bit mapped graphics, a viewing port (11), an embedded processor (12), a simplified user interface (15), a data compression algorithm, and other supporting electronics. The viewport (11) is configured such that the data presented in the viewport is clearly visible in any ambient light condition. The database stores compressed image data which might include topographical map data, user annotations, building plans, or any other image. The system includes an interface to a personal computer (14) which may be used to annotate or edit graphic information externally to the device for later upload. In addition, the device contains a simple menu-driven user interface (15) which allows panning and zooming of the image data, marking locations of interest, and other such functions. The device may be operated from an internal rechargeable battery, or powered externally.

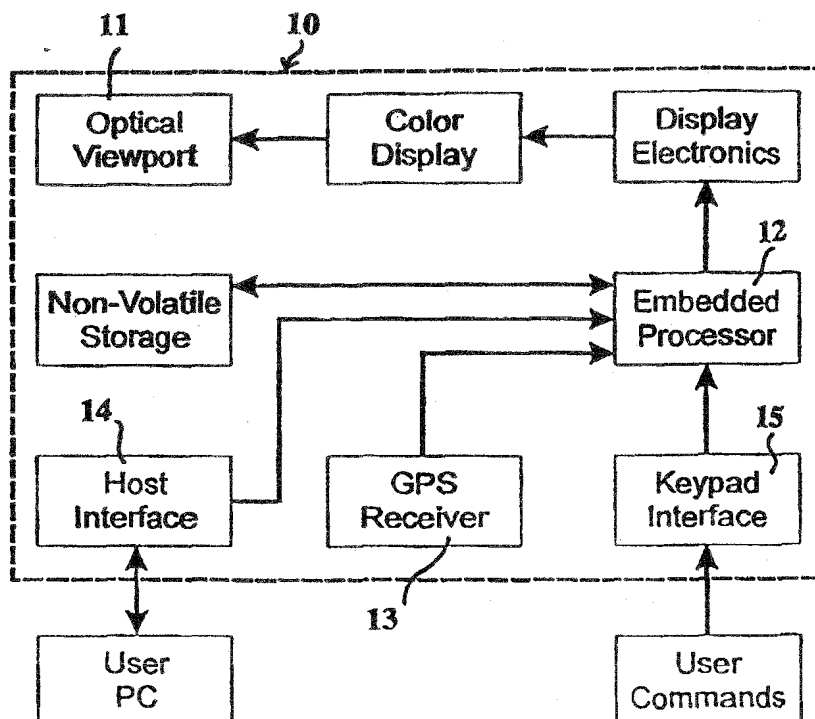

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

HAND-HELD GPS-MAPPING DEVICE

FIELD OF THE INVENTION

This invention relates generally to navigation and tracking and specifically to providing real-time positioning on a map image.

BACKGROUND OF THE INVENTION

Most personal navigation systems exist as hand-held devices which report position in terms of latitude, longitude, and altitude. Primitive mapping functions are usually provided that display the path that a user has followed or provide a simple steering indication to facilitate taking a straight line path towards a desired coordinate. More sophisticated systems may include low resolution map information upon which the users coordinates are overlaid.

There are several problems with these existing systems. First, the use of LCD-type displays makes these devices virtually unusable in direct sunlight because of insufficient display contrast. Second, because the storage of detailed images requires large amounts of data storage, map resolution is limited. Third, because of these storage limitations and because of the difficulty of obtaining accurate map data, the selection of maps for users to exploit is very small.

Addressing these issues requires a device which makes improvements in two fundamental areas. First, a new display system is needed which will allow the user to see presented images clearly in all lighting conditions. Second, improvements in data storage must be made to allow the user to store a meaningful amount of high accuracy data.

BRIEF DESCRIPTION OF THE DRAWINGS

The elements of the device described in the following paragraphs which constitute the invention are established in the appended claims. However, understanding the nature of the invention is aided by fully disclosing the characteristics of the device. The following diagrams and illustrations are provided to aid in this understanding:

FIG. 1 is a block diagram representation of the entire system;

FIG. 1c, 2a, 2b, and 2c illustrate the mechanical concept, showing a likeness of the packaging of the hand-held portion of the system;

FIG. 3 illustrates the mechanical concept of the optical viewport which shows how the optics are oriented relative to the display and electronic cabling;

FIG. 4 illustrates the arrangement of lenses relative to the display and details aspects important to shielding the display from ambient light in the optical view port;

FIG. 5 illustrates the basic concept behind the organization of a TIFF format data file for TIFF image storage;

FIG. 6 is a flow diagram of the encoding/decoding process for georeferenced data storage (TIFF image decompression);

FIG. 7 describes the approach used to attach geographic significance to the stored data file by determining precise spatial relationships;

FIG. 8 is a flow diagram of a tile-based compression process embodying the principles of the present invention;

FIG. 9 portrays an approach to providing geographical referencing for each image tile within an image (georeferenced image tiles); and

FIG. 10 illustrates the concept of a tile-based image data file embodying the principles of the present invention (georeferenced file format).

DETAILED DESCRIPTION OF THE INVENTION

A block diagram of the system is provided in FIG. 1. As illustrated in the figure, the system 10 contains an optical viewport assembly 11 which takes a small (nominally 18mm diagonal) LCD or equivalent display and expands the image such that it appears to the user as a full-size computer display. The image is controlled by an embedded processor 12 which retrieves georeferenced map data from a non-volatile storage system. The processor uses position information received from the Global Positioning System (GPS) receiver 13 and creates an image showing the user's position on the color display. The host interface 14 is used to load map data into the handheld unit and the user interface 15 contains pushbuttons for the user to pan and zoom and which allow setting up and configuring the unit.

The purpose of this device is to allow a user to store maps and other information in a small, portable device that also provides position information using a GPS receiver. When using this device, a user would typically obtain raster-format digitized maps which would be edited using companion software on a personal computer. Edits might include the addition of points of interest, waypoints, trails, or other pertinent data. This information would then be uploaded to the device, which would store it in non-volatile memory. Non-volatile storage may also reside on removable memory cards which the user inserts into the handheld unit.

In operation, the device then becomes self-contained, housing a GPS receiver, internal rechargeable batteries, map data, and a user display. Using a menu driven interface, the user can see where they are on the map and perform other functions such as calculating the distance to a particular point, or panning and zooming the image to investigate map details. To support users without access to a personal computer, the design shall also allow the user to purchase memory cards that are pre-programmed with map data covering specific geographical regions to which the user can add waypoints, trails, and other information using the device's user interface.

In this device there are two areas to which the invention is particularly directed: the optical viewport assembly 11 and the georeferenced data storage/access.

FIG. 2 illustrates the mechanical configuration of the device. The device will be housed in a light-proof, high-impact plastic case 16 that is sufficiently conductive internally to shield the internal electronics. On the left side (as viewed from the top) is an optical viewing port 11 that allows the user to see an internal display. In general, the viewport housing may be movable to allow the user additional flexibility when operating the device.

Along the top of the device are user interface buttons. A hexagonal pad dominates the user interface and provides the user the ability to scroll the display right, left, up, down, or along a diagonal. Additional buttons are provided to allow the user to zoom in or out, turn the unit on or off, and to provide additional functions. The front of the unit holds jacks for communications with an external PC, memory cards, and power for using an external battery and recharging the internal batteries. The antenna for the GPS receiver is contained internally.

The housings is designed in a manner that minimizes penetration by water, salt, sand, and other environmental hazards.

A mechanical overview of the optical viewport assembly 11 is illustrated in FIG. 3. At the front end of the device, a rubber bellows light shield 17, similar in nature to a camera light shield, reduces the amount of external light which enters the viewport. A system of plastic, polycarbonate, or glass lenses 18 gives the user the illusion that they are viewing a much larger screen than physically exists in the device. The goal is to have the image appear to be approximately 22 x 30 centimeters as viewed from a distance of about 40-60 centimeters. The (color) display 20 interfaces to the electronics using a flexible cable 19 which passes from the viewport housing into the electronics area E of the main housing.

To prevent the entry of contaminants, the viewport housing halves may include a compression gasket. Similarly, the mechanical supports for the optical components may be designed to provide a gas proof seal. Nothing in the design shall prohibit using techniques such as filling the optical area with an inert gas to inhibit the formation of condensation if the device is subjected to temperature and humidity extremes.

The details of the optical imaging system 20 are provided in FIG. 4. Novel characteristics of the viewport include a lack of movable components and sufficient shielding of ambient light that the display becomes usable in direct sunlight. Conversely, provision for backlighting the display allows use of the device in low ambient light conditions. If a focus control proves necessary, it would be integrated between the eyepiece bellows and the first lens of the imaging system.

Data storage and retrieval is a major problem when handling geographic data. A typical USGS quad sheet may require as much as 40-60 Mbytes of storage in uncompressed format. With compression, the data storage requirement drops to approximately 10-15 Mbytes.

In most graphical applications, a 10-15 Mbyte compressed image is decompressed into virtual memory to its original size at which point it can be accessed as if it was a single large array. Since the total memory available in the handheld device will generally be far less than the uncompressed image requires, a more novel data compression, retrieval, and storage scheme is required.

twofold. First, these file formats generally allow storing information randomly in memory. Second, the data in the files is compressed into variable length records using a technique such as Bit Packing, LZW or Huffman coding. This results in a file that is encoded in a manner that makes it difficult to directly access an arbitrary portion of the compressed image (as would be common when doing pan and zoom).

As an example, FIG. 5 illustrates the manner in which a TIFF file stores image data. Each TIFF file begins with a predefined header 21 which describes certain essential characteristics of the file such as the byte order, the number of images in the file, and so on. At the end of the header there is a pointer 22 to the first of possibly many directory entries, each of which contains information describing where the data for the component images is stored in the file. These directories contain pointers to the file locations 23 where lines of image data are stored. Since each line of image data is compressed, each record may be of different length.

The decompression process works in a manner similar to that shown in FIG. 6. The decompression algorithm uses the TIFF header information to determine how many data pointers exist in the file, how long each image data line should be, and the start address of the data pointers. Next, each line is decompressed in sequence to construct the uncompressed image. Only when the image is fully decompressed is the spatial relationship between pixels fully known since the compression algorithm terminates only when it has decompressed a full line of pixels 24.

As illustrated in FIG. 7, once the image is fully decompressed, precise spatial relationships can be determined. This is accomplished by georeferencing the image data by correlating pixel locations with land features. By knowing the geographic location of one or more reference pixels 25, the orientation of the pixel image, and distance represented by adjacent pixels (dx and dy) good correspondence between the image and the mapped features is obtained.

The solution to this problem according to the present invention is outlined in FIG. 8. As shown in the figure, there are two main steps required to process the original TIFF (or other) format image data. The first step involves recovering the original scanned image by decoding it from its original storage format in a TIFF file 26 into a complete, uncompressed pixel image 27. The second step involves post-processing the image by dividing it into more

useful square arrays, or tiles, of georeferenced pixel data. An output file 28 is created which contains header information describing size and geographical location of each tile, pointers to the tile data, and compressed tile data.

As shown in FIG. 8, the major steps required to post process the data begin with georeferencing the original image followed by tiling. This georeferencing is done by appending geographical coordinates (latitude, longitude, and altitude) from referencing data 29 to one or more pixels in the uncompressed image and by providing a suitable mathematical expression to relate pixel spacing to geographical spacing. This mathematical expression may be as simple as a scaling factor such as 1 pixel = 50 feet, or it may be a more complicated expression which accounts for spherical corrections.

A typical 1:25,000 scale topographic map spans an area of approximately 15 x 20 kilometers. Since a land user is typically concerned with only a small portion of this data at any given time, the full image is divided into tiles, each of which contains the data for a significantly smaller region (for example 1 square kilometer). The size of the tiles is governed by a tradeoff between the number of tiles which must be stored uncompressed in memory and the speed of decompression. In general, it is expected that a land user will require at least 4 active tiles in memory to allow seamless panning in the event that the user is located at the intersection of four tiles.

Providing geographical referencing for each tile is accomplished, as illustrated in FIG. 9, by computing the geographic location of each tile using geographic reference points 30 and tile reference points 31. Knowing this information, along with the orientation of the tile relative to the full-image geographical reference point and the size of the tile, allows directly determining which tile contains any possible location on the map.

To facilitate efficient use of the tiled data, a file structure such as the one illustrated in FIG. 10 is proposed. A header field 32 contains information about the file structure such as the number of tiles, tile size, number of pixels, aspect ratio, and the required geographic interpolation parameters to calculate position. Following the header, is a variable length field consisting of fixed length records 33 which include a pointer 34 to the start of the image data in each tile and the geographical reference 36 for the tile. The remaining fields are variable length fields 35 which contain compressed image data for each tile.

Given this format, both the location of the tile data in the file and the geographic location of the tile reference are both known. Because this is true, variable length data fields no longer pose a problem, since each tile covers a minimum acceptable geographic region. Thus, given a user location, the tiles needed by the user can be directly identified. Since the starting location of the data is known both geographically and in terms of data storage only the desired tile need be decompressed. This format also facilitates caching uncompressed tiles based on user movement to facilitate smooth pan and zoom without requiring that the entire image be decompressed in memory.

CLAIMS

1. A device for personal, portable mapping and navigation, by a user, and adapted to display a map image to the user and to display, to the user, the user's actual location, on the map image, comprising:

- a) a case,
- b) a digital computer mounted in the case,
- c) a location receiver unit associated with the case and adapted to provide user location information to the computer.
- d) an image storage unit adapted to store image data and to provide the image data to the computer,
- e) a display unit adapted to receive data from the computer and display the data as an image to the user, the display unit being a video-camera-type viewfinder, including a light excluding barrel, a miniature solid-state video display chip, at one end of the barrel and adapted to form a miniature image, a viewing aperture at the other end of the barrel, and a lens system mounted in the barrel and adapted to present an enlarged version of the miniature image to the viewing aperture.
- f) a computer program adapted to control the computer, and to cause the computer to present the user location information and the image data to the display unit so that the display unit displays, to the user, a map image and the user's actual location, on the map image.

2. A device, as recited in Claim 1, wherein said image data includes a plurality of tile data which tiles, taken together, represent a map image, said image data including;

- i) header data describing the size and geographical location of each tile,
- ii) pointers to the location, in the storage unit, of the data for each tile,
- iii) compressed tile data for each tile.

3. A device as recited in Claim 2, wherein said program includes;
 - i) an associating routine for associating the user location with one of the tiles,
 - ii) a decompressing routine for decompressing the tile data for the said one of said tiles into a tile image for the said one of said tiles, and
 - iii) a locating routine for locating the user's location on said tile image.
4. A device as recited in Claim 1, wherein the location receiver is a G.P.S. receiver.
5. A device for personal, portable mapping and navigation, by a user, and adapted to display a map image to the user and to display, to the user, the user's actual location, on the map image, comprising:
 - a) a case
 - b) a digital computer mounted in the case,
 - c) a location receiver unit associated with the case and adapted to provide user location information to the computer.
 - d) an image storage unit adapted to store image data and to provide the image data to the computer, said image data including a plurality of tile data which tiles, taken together, represent a map image, said image data including;
 - i) header data describing the size and geographical location of each tile,
 - ii) pointers to the location, in the storage unit, of the data for each tile,
 - iii) compressed tile data for each tile.
 - e) a display unit adapted to receive data from the computer and display the data as an image to the user,
 - f) a computer program adapted to control the computer, and to cause the computer to present the user location information and the image data to the

display unit so that the display unit displays, to the user, a map image and the user's actual location, on the map image, said program including;

- i) an associating routine for associating the user location with one of the tiles,
- ii) a decompressing routine for decompressing the tile data for the said one of said tiles into a tile image for the said one of said tiles, and
- iii) a locating routine for locating the user's location on said tile image.

6. A device as recited in Claim 5, wherein the program includes a peripheral routine which identifies and decompresses a peripheral tile which is adjacent to the said one of said tile, so that the decompressed image said peripheral tile is available to the computer for special visual effects.

7. A device as recited in Claim 6, wherein the program includes a projection routine which projects the movement trend of the user's location and identifies and decompresses the successor tile which is adjacent the said one of said tile and in the path of movement of the user's location, so that the decompressed image of said successor tile is available to the computer as the user's location changes from the said one of said tiles to the said successor tile.

8. A device as recited in Claim 5, wherein the location receiver is a GPS receiver.

9. A device as recited in Claim 5, wherein the header contains information about the file structure including the number of tiles, tile size, number of pixels, aspect ratio, and the required geographic interpolation parameters to calculate position.

10. A device as recited in Claim 5, wherein the pointer recites to the location, in the storage unit, of the start of the image of a tile and the geographic reference to the tile.

11. A system for storing an image and viewing a portion of the image, comprising the steps of:

- a) selecting an image,
- b) dividing the image into tiles,
- c) establishing geographical referencing of each tile in its physical relationship within the image,
- d) compressing the image of each tile,
- e) forming an output file of image data of all of the tiles, which, taken together, represent said image, said image data including:
 - i) header data describing the size and geographical location of each tile,
 - ii) pointers to the location, in the storage unit, of the data for each tile,
 - iii) compressed tile data for each tile.
- f) storing the image data in the output file in an image storage unit adapted to store image data and to provide the image data to a computer,
- g) selecting a tile to view using the geographical referencing data,
- h) locating the tile image data of the said tile using the pointer, and
- i) decompressing the tile image data of the said tile.

1/8

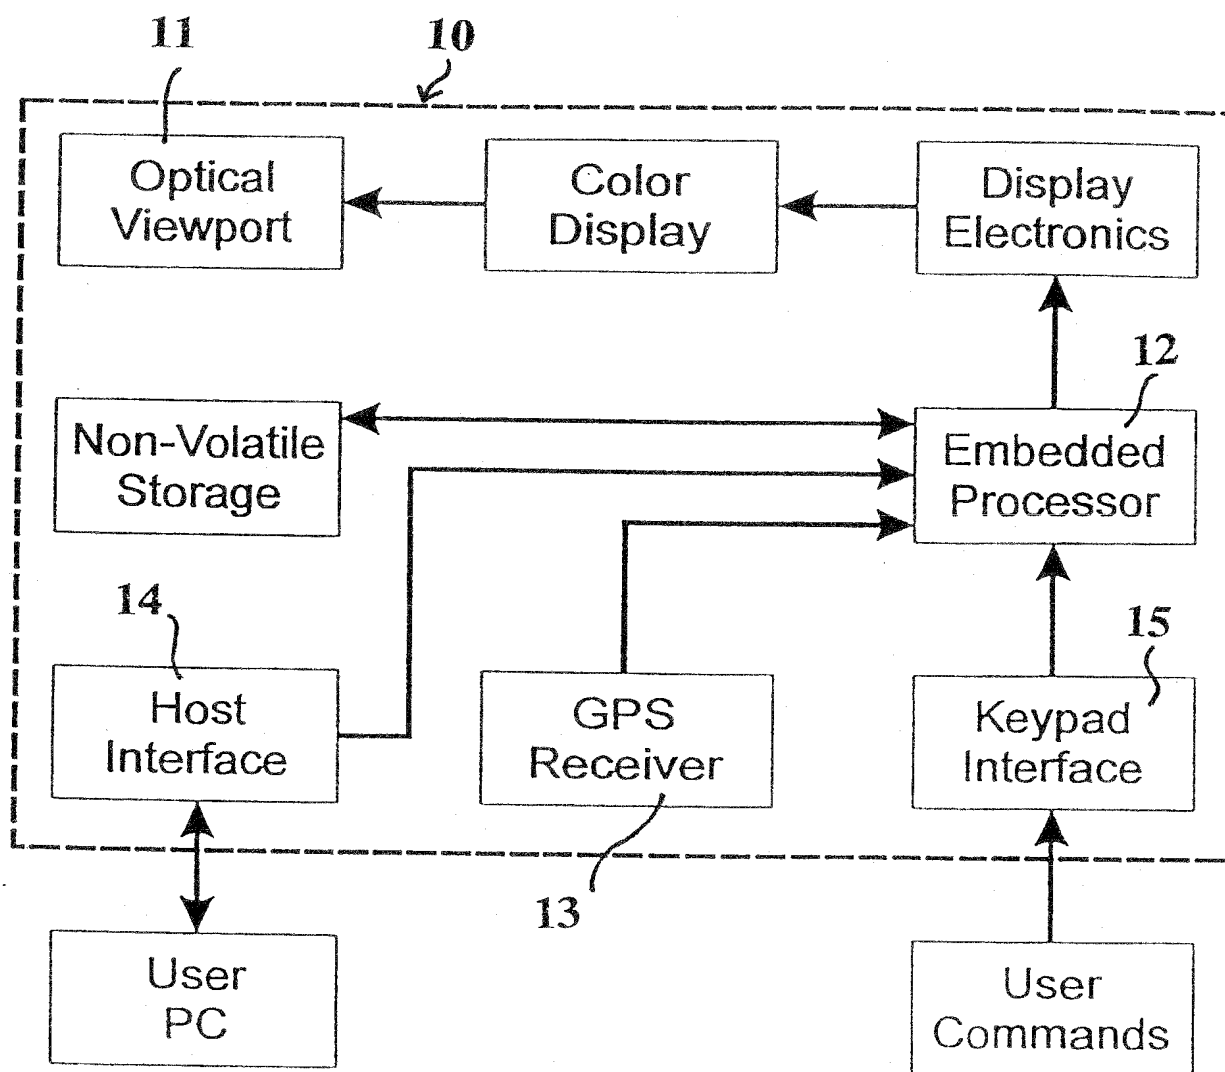


FIG 1

2/8

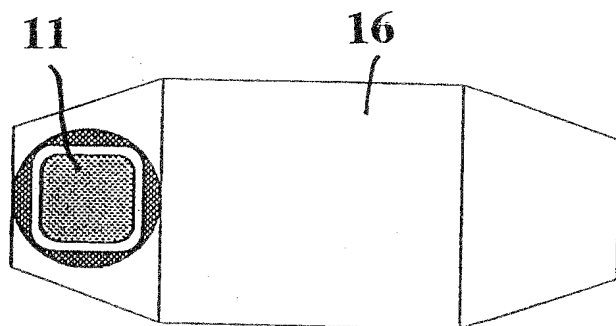


FIG 2a

FIG 2b

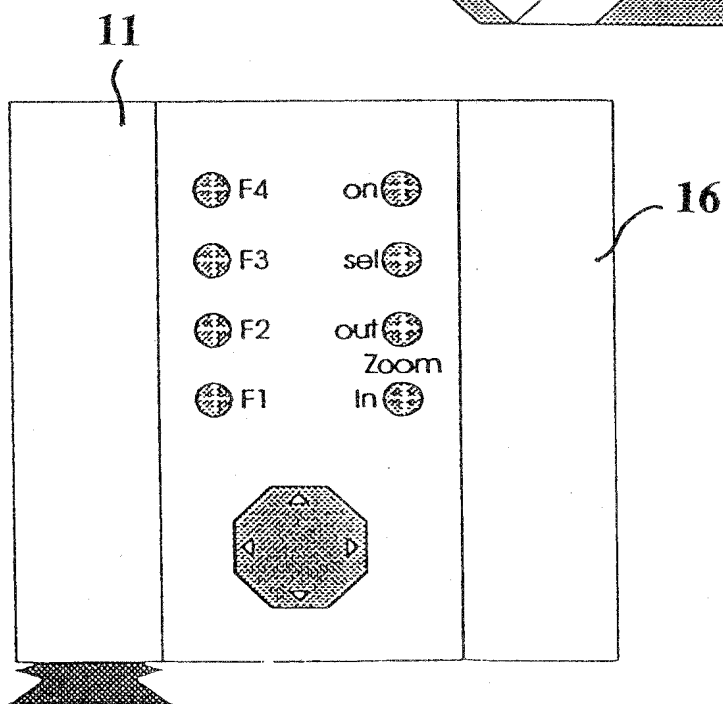
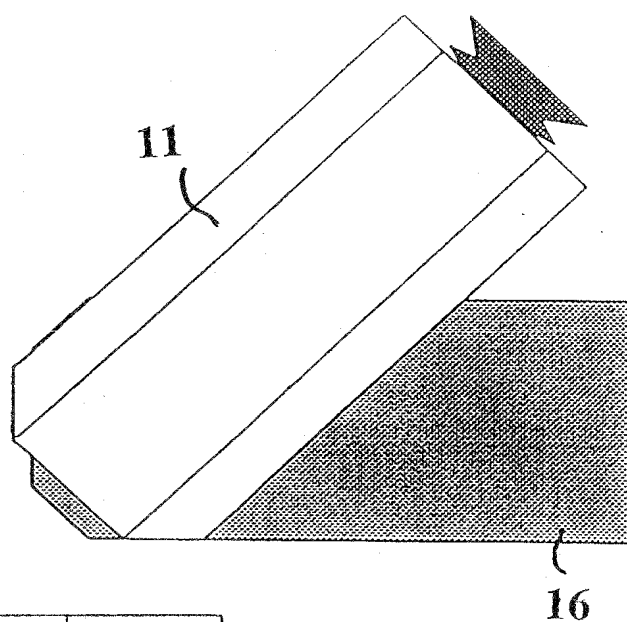


FIG 2c

3/8

FIG 3

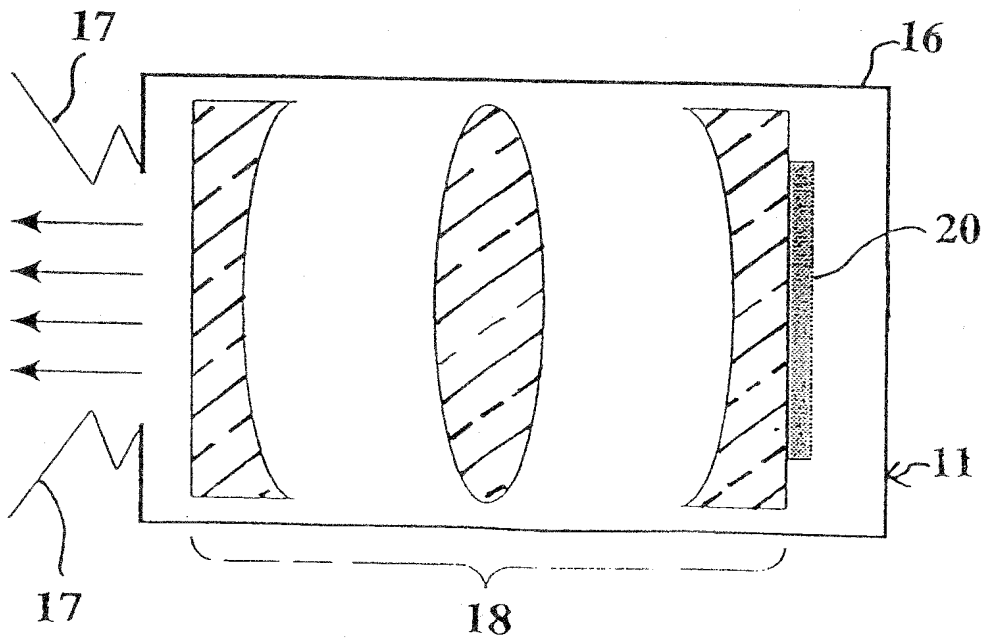
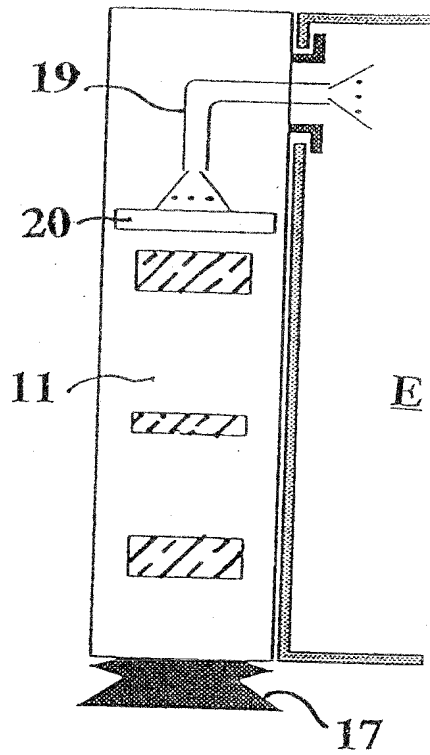


FIG 4

4/8

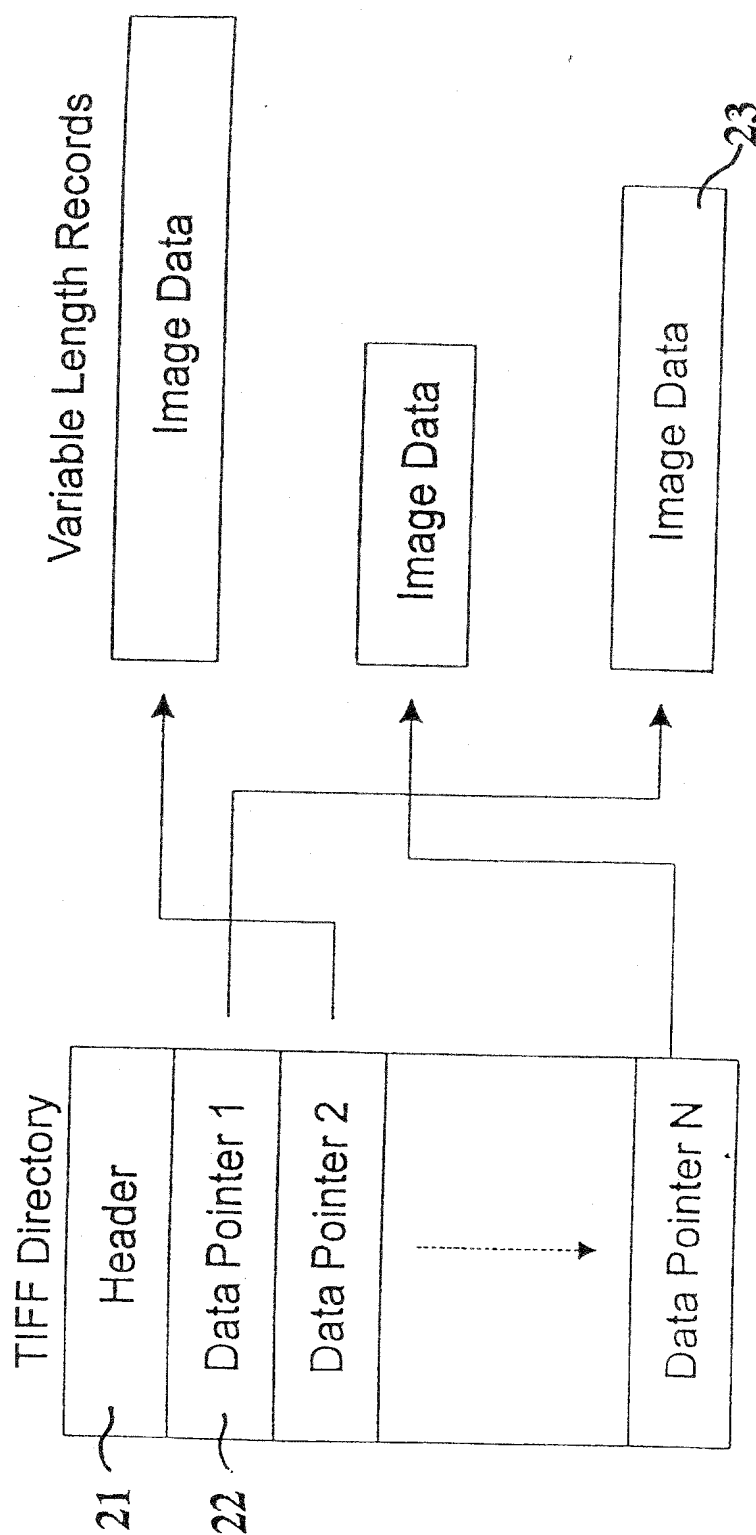


FIG 5

5/8

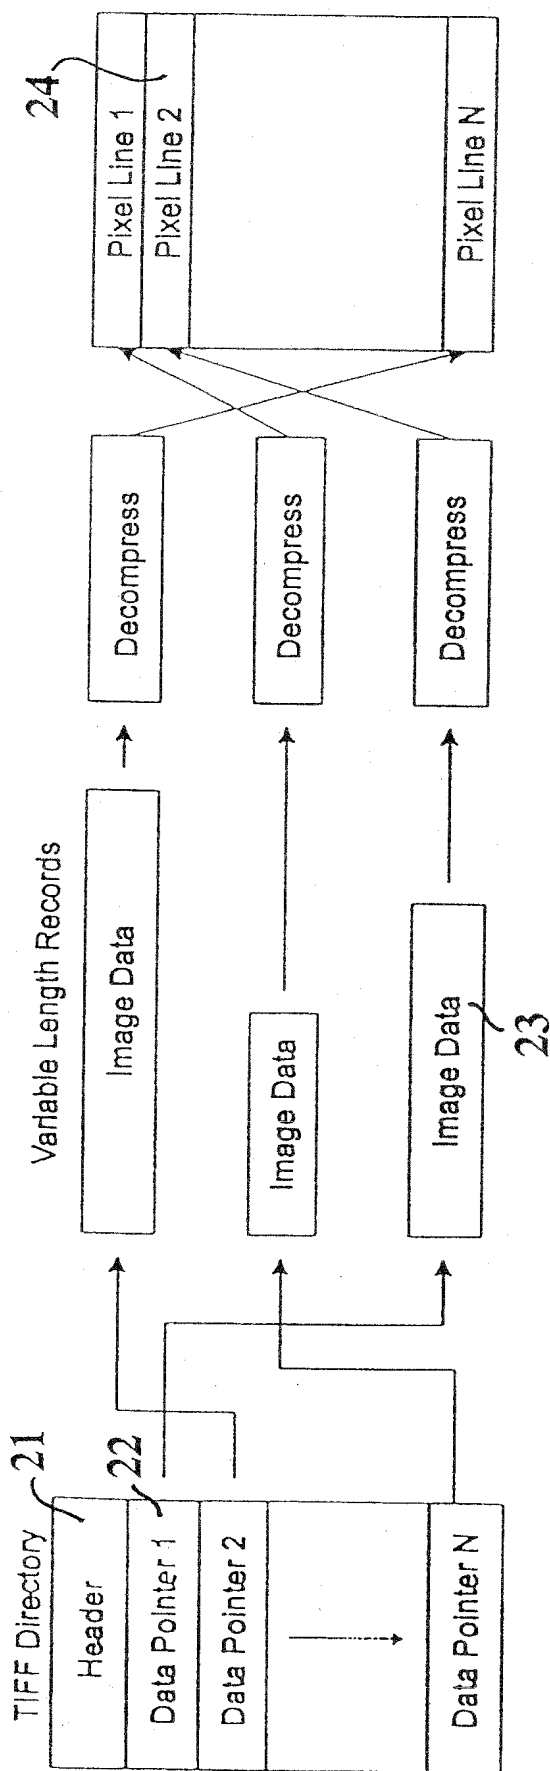


FIG 6

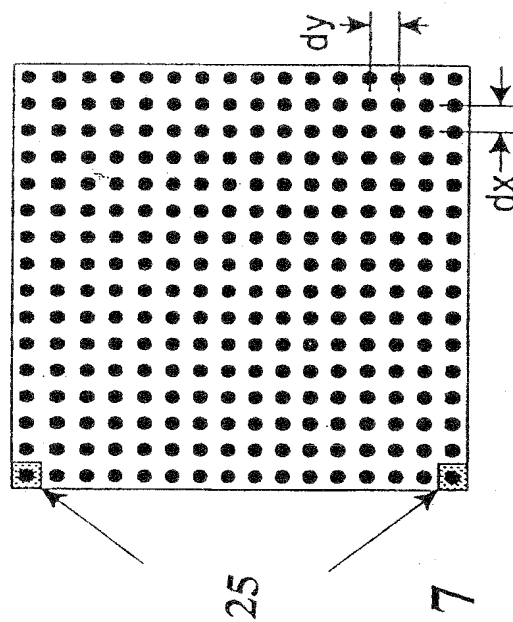


FIG 7

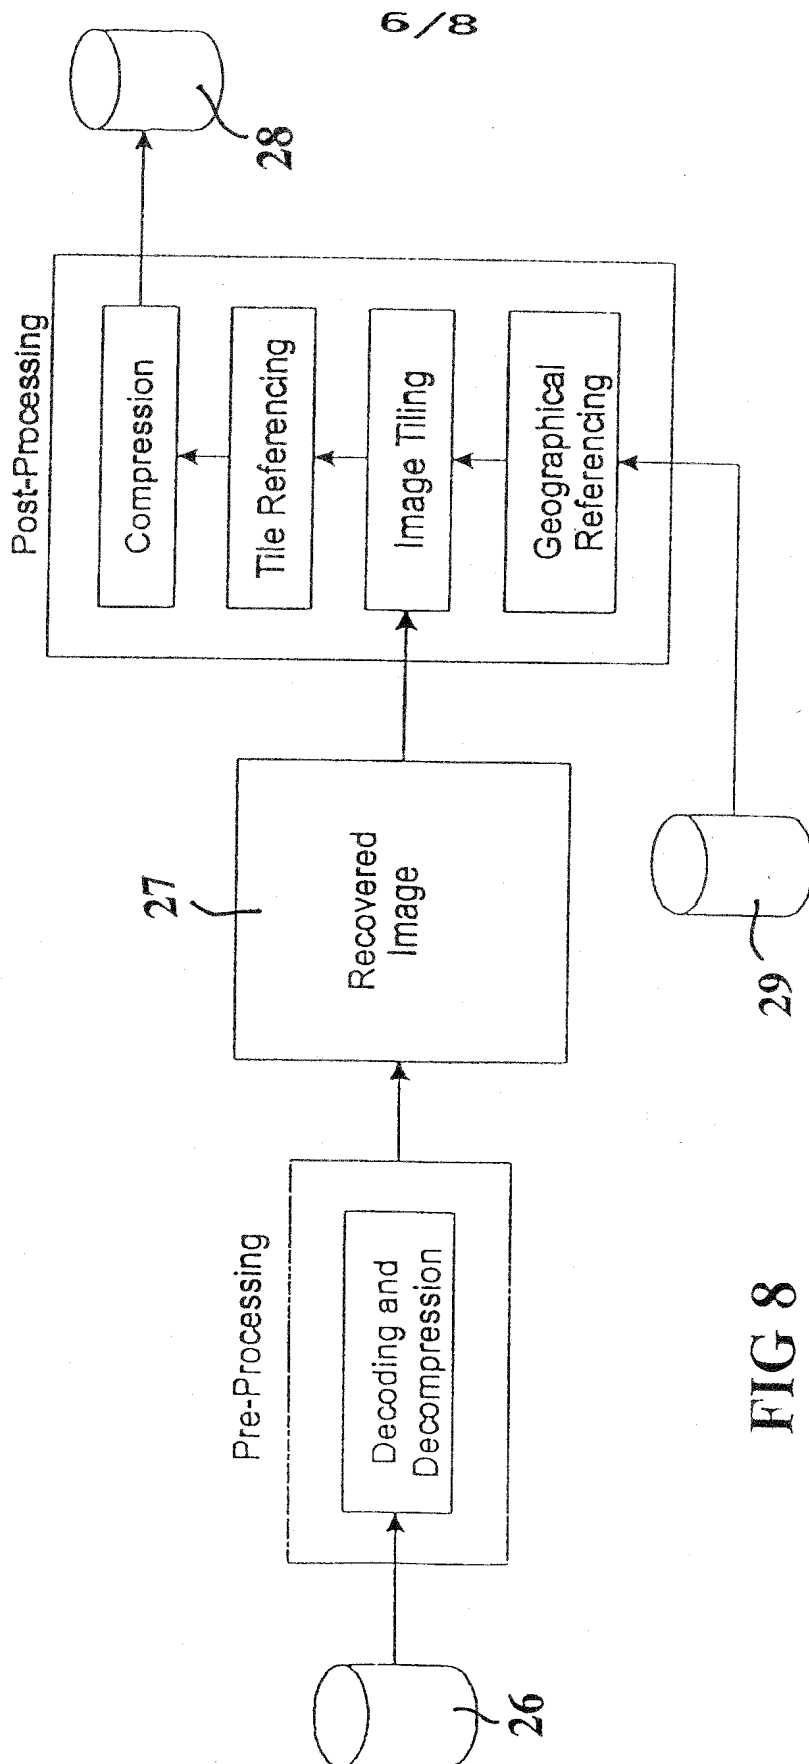


FIG 8

7/8

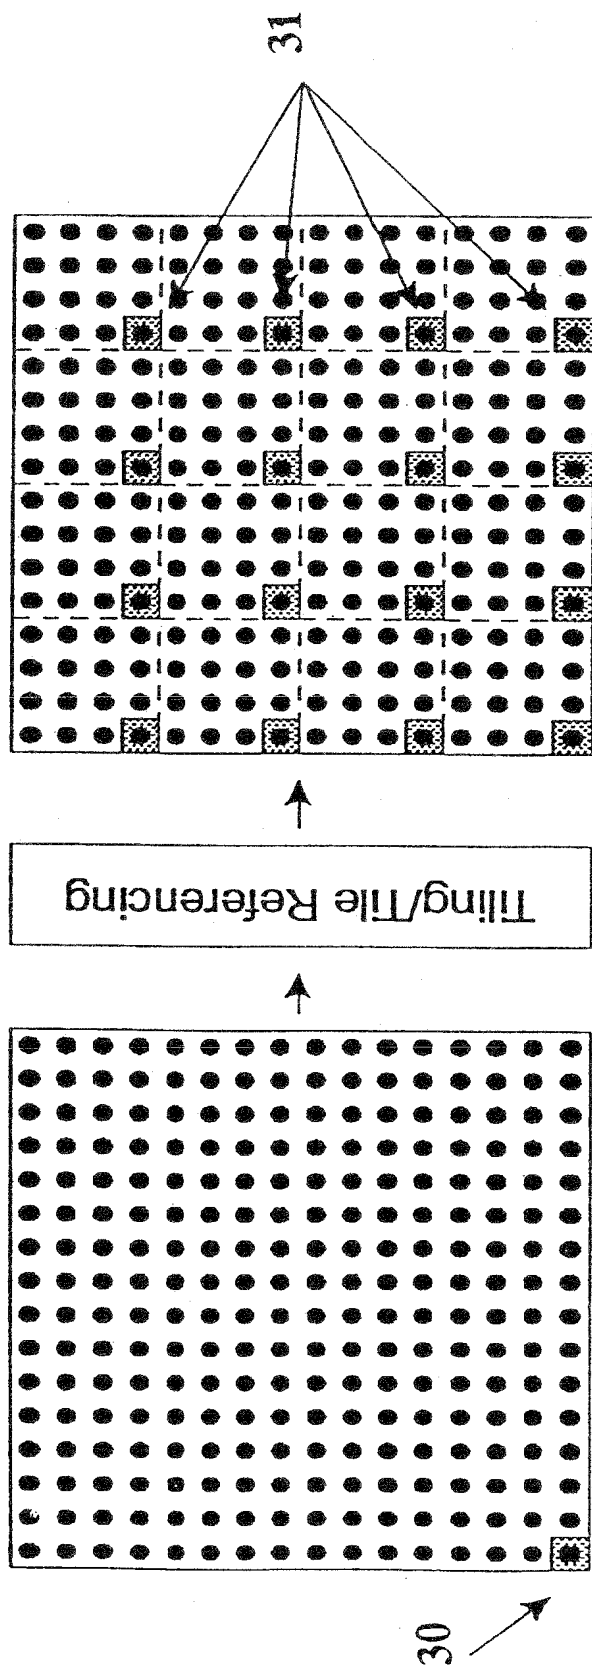


FIG 9

8/8

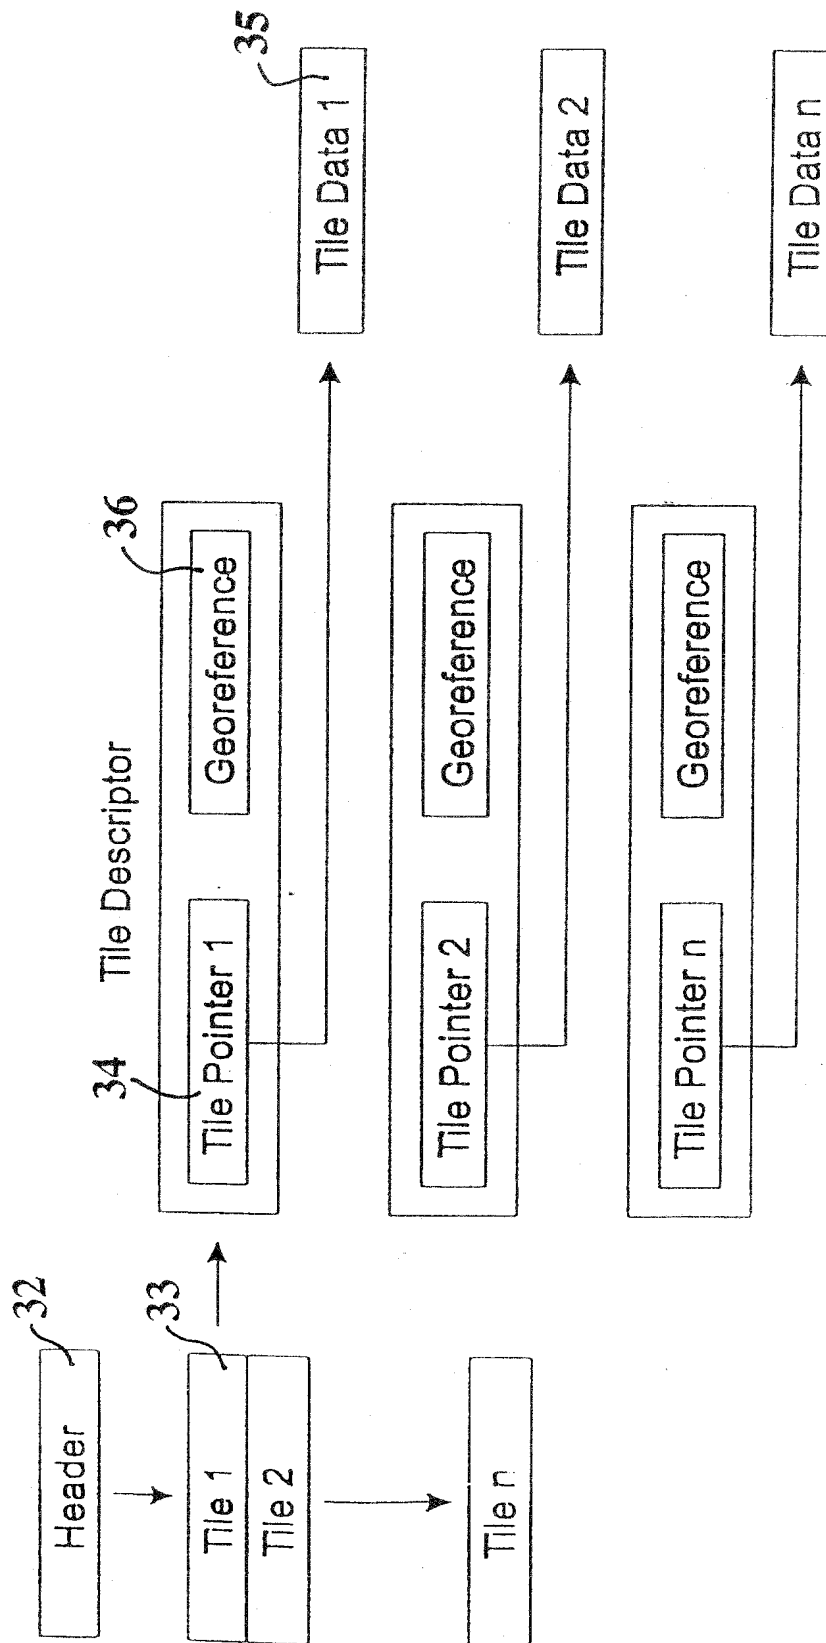


FIG 10

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/US97/21119

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G01S 3/02; H04N 7/100, 5/222, 5/225; G08G 1/123

US CL : 342/451; 348/116, 333, 376; 340/995

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 342/357, 451, 457; 348/113, 116, 158, 333, 334, 340, 341, 376; 340/990, 995; 396/373, 374; 701/208, 212

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y, E	US 5,699,115 A (HIRAKI et al) 16 DECEMBER 1997, SEE FIGURE 2 AND 14	1
Y	US, 5,168,384 A (GENBA) 01 DECEMBER 1992, SEE FIGURE 1	1
Y	US 5,381,338 A (WYSOCKI et al) 10 JANUARY 1995 SEE ENTIRE DOCUMENT	1-11
Y	US 5,315,298 A (MORITA) 24 MAY 1994, SEE FIGURE 1, col. 1, line 46- col. 2, line 20	1-11
Y	US 4,888,698 A (DRIESSEN et al) 19 DECEMBER 1989, see entire document	1-11
Y	US 4,815,012 A (FEINTUCH) 21 MARCH 1989, see entire document	1-11

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	* J*	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A* document defining the general state of the art which is not considered to be of particular relevance	* X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
* E* earlier document published on or after the international filing date	* Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
* L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* &*	document member of the same patent family
* O* document referring to an oral disclosure, use, exhibition or other means		
* P* document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

03 MARCH 1998

Date of mailing of the international search report

26 MAR 1998

 Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

GREGORY C. ISSING

Telephone No. (703) 306-4156

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/21119

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,550,317 A (MORIYAMA et al) 29 OCTOBER 1985, see entire document	1-11

Form PCT/ISA/210 (continuation of second sheet)(July 1992)★




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01S 3/02, H04N 7/100, 5/222, 5/225, G08G 1/123		A1	(11) International Publication Number: WO 98/22831
			(43) International Publication Date: 28 May 1998 (28.05.98)
(21) International Application Number: PCT/US97/21119		(74) Agents: BLODGETT, Gerry, A. et al.; 43 Highland Street, Worcester, MA 01609 (US).	
(22) International Filing Date: 19 November 1997 (19.11.97)			
(30) Priority Data: 60/031,655 19 November 1996 (19.11.96) US 08/835,037 27 March 1997 (27.03.97) US		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 08/835,037 (CON) Filed on 27 March 1997 (27.03.97)		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant (for all designated States except US): AMERICAN NAVIGATION SYSTEMS, INC. [US/US]; 115 West Main Street, Millbury, MA 01527 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): BACKMAN, Douglas, J. [US/US]; 3 Glenwood Road, Southborough, MA 01772 (US). ROE, Gene, V. [US/US]; 14 Bear Hill Road, Henniker, NH 03242 (US). DEFALCO, Frank, D. [US/US]; 80 Salisbury Street, Worcester, MA 01609 (US). MICHALSON, William, R. [US/US]; 26 Denfield Road, Charlton, MA 01507 (US).			

(54) Title: HAND-HELD GPS-MAPPING DEVICE

(57) Abstract

A hand-held navigation, mapping and positioning system and device (10) contains a Global Positioning System (GPS) receiver (13), a database capable of storing vector or bit mapped graphics, a viewing port (11), an embedded processor (12), a simplified user interface (15), a data compression algorithm, and other supporting electronics. The viewport (11) is configured such that the data presented in the viewport is clearly visible in any ambient light condition. The database stores compressed image data which might include topographical map data, user annotations, building plans, or any other image. The system includes an interface to a personal computer (14) which may be used to annotate or edit graphic information externally to the device for later upload. In addition, the device contains a simple menu-driven user interface (15) which allows panning and zooming the image data, marking locations of interest, and other such functions. The device may be operated from an internal rechargeable battery, or powered externally.

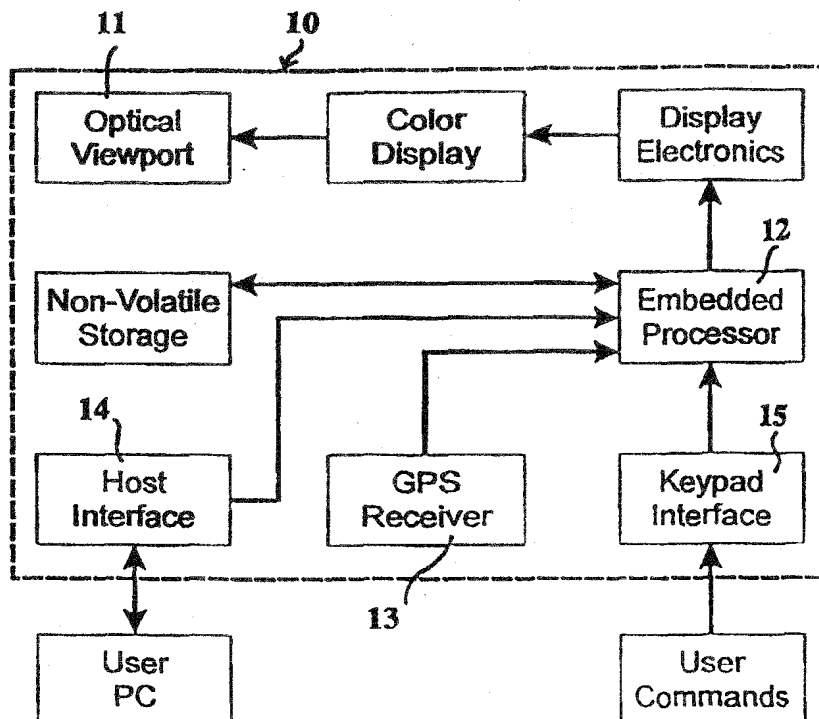

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		